



Quilt-As-You-Go Technique

Cutting Instructions: 45"x45" Quilt using nine 11.5" blocks

Fabric Requirements

2 1/2 yards for Blocks	1 Crib size Batting 45"x60" 80/20 Poly Cotton or Scraps if you have them
1 3/4 yards for Sashing	
1/2 yard for Binding	

Square up and Measure your Quilted Squares

For: Block Sashes

Cut 6 Each:

Top - 3 1/2" x Width of Square

Batting - 3" x Width of Square

Backing - 3 3/4" x Width of Square

The rest of the sashing and borders need to be cut AFTER you have combined your rows of blocks

Refer to the "Quilt as You Go" Directions on Blocks Assembly & Sashing

For: Center Sashes

Cut 2 Each:

Top - 3 1/2" x Length of Row

Batting - 3" x Length of Row

Backing - 3 3/4" x Length of Row

Position and attach layers the same as for Block Sashes

For: Side Borders

Cut 2 Each:

Top - 3 1/2" x Length of the Sides

Batting - 3-1/4" x Length of the Side

Backing - 3-1/2" x Length of the Sides

For: Top and Bottom Borders

Cut 2 Each:

Top - 3 1/2" x Length of the Quilt Top

Batting - 3-1/4" x Length of the Quilt Top

Backing - 3 1/2" x Length of the Quilt Top

Lisa Dodson
Phone 765-813-0311

Lisa Loves
to Quilt

email: Lisalovestoquilt@ymail.com
web: www.lisalovestoquilt.com



"QUILT AS YOU GO " Directions

1 Layer the Sashing for the Blocks as follows:

- > Backing with wrong side up
- > Batting Centered on the Backing
- > Top Fabric Wrong Side Down, Centered on Batting

Stitch the Sashing Down the Center with a straight or decorative stitch



- ### 2 Lay top sashing right sides together on the top side of quilt block
- Fold Back the Batting and Backing
Stitch with a 1/4" seam



3 Press Seam towards Sashing


- Turn the piece over so you are working on the back side of the quilt
Tuck the batting beneath the seam allowance
Trim the Batting, if needed, to make all layers lay flat



- 4 Fold edge of the backing fabric so it lays just past the stitch line and press the fold
Place Wondertape on seam edge to secure the fold
Using a decorative stitch; secure the folded edge
Repeat for the opposite side of sashing and the next quilt block
Add more quilting to sashing if necessary to match quilting density in the blocks
Use the Same Technique for each of the short sashes and the two center long sashes



- 5 To attach outside borders, lay the right side of the fabric backing border along the back side of the assembled quilt and
Lay the right side of the top border along the right side of the top
Then stitch all pieces together with a 1/4" seam
Press the bottom border piece seam towards the border edge
Press the top border seam towards the blocks
Sandwich the batting piece between the two matching edges of the batting smoothly with the seam edge
Press the top border fabric over batting so that all 3 layers are quilted together
Use a decorative stitch over seam like the overstitching on the center sashing
Continue stitching the border so that the density of the quilting matches the density of the quilted blocks

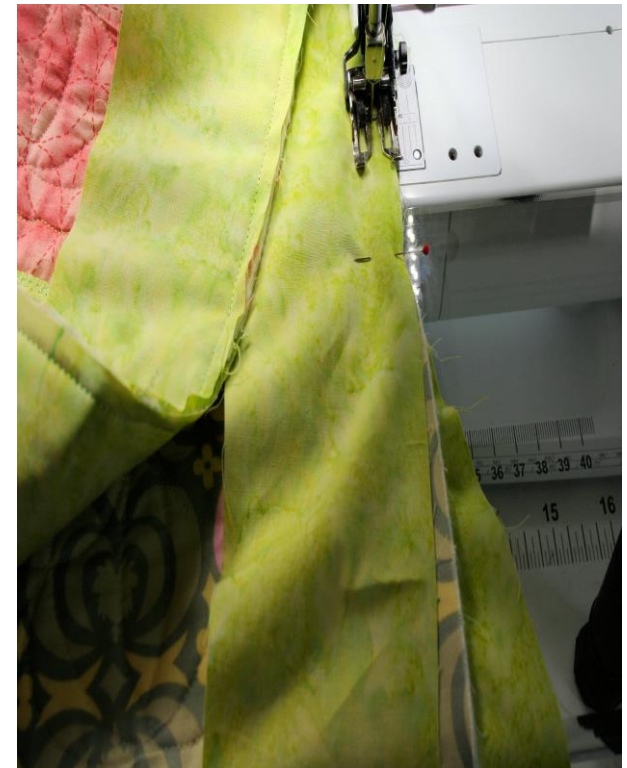

<p>Lisa Dodson Phone 765-813-0311</p>	<p>Lisa Loves to Quilt</p>	<p>email: Lisalovestoquilt@gmail.com web: www.lisalovestoquilt.com</p>
---	--------------------------------	--